

规格承认书 Specification

客户名称 Customer Name				
客户型号 Customer Model				
客户料号 Customer Part Number				
产品型号 Product Model	VKPGC-16S200A-LC10A-Y0 主动均衡 active balancing (VK)			
版本 Version	V2. 1			
日期 Date	2026-06-08			
产品清单 Product List	序号 S/N	名称 Name	型号 Model	数量 Qty.
	1	16S200A 一体保护板主动均衡 CAN 并机 Integrated Protection Board with Active Balancing (CAN Parallel Operation)	VKPGC-16S200A-LC10A-Y0 主动均衡 active balancing(BHB209)	1pc.
	2	弱电开关线 Low-voltage switch wire	2.54mm 间距 单头 XP HOUSing 26AWG 另一头浸锡长度 3mm 线长 50cm (XC070)	1pc.
	3	动力连接线 (B+) Power Connection Cable (B+)	动力连接线 B+电池端 标准长度 30cm (XC102) Power Connection Cable for B+ Battery End, Standard Length 30cm (XC102)	1pc.
	4	温度采集线 Temperature acquisition wire	温度采集线(水滴状) 标准长度 65cm (XC001) Temperature acquisition wire (in the shape of a water drop) with standard length of 65cm (XC001)	1pc.
	5	电压采集线 BC0~8 Voltage acquisition wire BC0~8	电压采集线 0-8 标准长度 85cm (XC002) Voltage acquisition wire 0-8 with standard length of 85cm (XC002)	1pc.
	6	电压采集线 BC9~16 Voltage acquisition wire BC9~16	电压采集线 9-16 标准长度 85cm (XC003) Voltage acquisition wire 9-16 with standard length of 85cm (XC003)	1pc.
供应商承认 Supplier Confirm			客户确认 Customer Confirmation	
制定 Prepared by			审查 Reviewed by	
核准 Approved by			核准 Approved by	

注意 (Notice) :

- 客户进行批量生产前, 需在规格书中签字回传, 并说明详细功能, 我司才会安排批量生产。Before the customer proceeds with mass production, they are required to sign and return the specification and explain the detailed functions, after which our company will arrange mass production.
- 贵司收到样品并确认后, 请及时签字回传。若 7 天内未签字回传且无问题反馈, 我司将默认样品测试合格。规格书中的图片为通用机型示意图, 可能与送样样机存在差异。After your company receives the sample and confirms it, please sign and return it in a timely manner. If there is no signed return or problem feedback within 7 days, our company will deem the sample test as qualified by default. The pictures in the specification are diagrams of general models and may differ from the sample machine sent.



产品功能配置表 Product Function Configuration Table

序号 S/N	功能 Function	定义描述 Definition Description	备注 Remarks	客户选择 Customer Selection
1	存储 Storage	数据记录>1 万条 Data recording > 10,000 pieces		
2	充电限流 Charging current limiting	10A（定义：电流>180A 开启）默认不使能 10A (Definition: Activated when current >180A); default disabled		
3	反接保护 Reverse connection protection	标配 Standard configuration		
4	弱电开关 Low-voltage switch	标配（提供线材和接口，开关客户自行配置） Standard configuration (Wire and interface are provided, and the switch is configured by the customer)		
5	蜂鸣器 Buzzer	标配 Standard configuration		
6	LED 灯 LED light	6 个 LED 灯（定义：1 个 ALM；1 个 RUN；4 个 SOC 指示） 6 LED lights (Definition: 1 ALM; 1 RUN; 4 SOC indicators)		
7	复位按键 Reset button	1 个复位按键（定义：长按 4S BMS 复位） 1 reset button (Definition: Long press for 4S to reset the BMS)		
8	RTC 时间 RTC time	标配 Standard configuration		
9	USB 通讯 USB communication	USB TYPE B 方口（定义：上位机接口和软件升级接口） USB TYPE B square port (Definition: Host computer interface and software upgrade interface)		
10	RS485	标配（定义：逆变器通讯口） Standard configuration (Definition: Inverter communication port)		
11	CAN-1	标配（定义：逆变器通讯口） Standard configuration (Definition: Inverter communication port)		
12	CAN-2	标配（定义：电池包并机口） Standard configuration (Definition: Battery pack parallel port)		
13	预充功能 Pre-charging function	标配 Standard configuration		
14	唤醒功能 Wake-up function	标配（定义：实现充电唤醒） Standard configuration (Definition: Achieve charging wake-up)		
15	主动均衡功能 Active Balancing Function	支持多节电芯同时均衡，采用单总线通信架构，无需复杂布线；均衡电流≥2A，可根据电芯压差动态调整均衡策略，快速拉平单体电压；集成汽车级均衡芯片，经过 -40℃~150℃三温测试，无电解电容设计，失效概率低 Supports simultaneous balancing of multiple battery cells, adopting a master-slave single-wire communication architecture without complex wiring; the balancing current is ≥2A, and the balancing strategy can be dynamically adjusted according to cell voltage differences to quickly equalize individual cell voltages. It integrates automotive-grade isolation chips, which have passed three environmental tests (-40°C, 150°C), and features a capacitor-free circuit design with low failure probability.		



选配功能	1	显示屏 Display screen	各尺寸触摸功能LCD显示屏 Touchscreen LCD displays (various sizes)		
	2	干接点 Dry contact	双路（定义：干接点 1 常开，故障保护时闭合；干接点 2 常开，低电量告警闭合） Dual ways (Definition: Dry contact 1 is normally open and closes during fault protection; dry contact 2 is normally open and closes for low battery alarm)		
	3	支持低串电芯 Support low-series battery cells	支持 8~15 串电芯电池包 Support battery packs with 8 to 15-series battery cells	需定制软硬件 Customized hardware and software are required	
	4	加热功能 Heating function	提供电池供电加热膜接口，控制开启关闭 Provide an interface for the battery-powered heating film and control the on and off	需定制软硬件 Customized hardware and software are required	
	5	二次保护 Secondary protection	提供电池供电继电器接口，实现二次保护功能 Provide an interface for the battery-powered relay to achieve the secondary protection function	需定制软硬件 Customized hardware and software are required	
	6	WIFI 模块 WIFI module	提供 WIFI 功能和云平台功能 Provide WIFI function and cloud platform function	需定制软硬件 Customized hardware and software are required	
	7	防盗窃模块 Anti-theft module	防盗窃功能，配合云平台实现远程提醒 Anti-theft function, and achieve remote reminder in cooperation with the cloud platform	需定制软硬件 Customized hardware and software are required	
客户新增需求 Customer's new requirements:					
客户签字确认 Customer's signature:					





文件更改摘要 Document Change Summary

日期 Date	版本号 Version No.	修订说明 Revision Instruction	制定人 Prepared by	核准人 Approved by
2025/12/17	V1. 1	第一版 First Edition.	罗漫	
2026/05/12	V2. 0	更新电芯温度保护参数、更新逆变器协议 Update cell temperature protection parameters、 Update inverter protocol	罗漫 Luo Man	
2026/06/08	V2. 1	更新电芯过温保护参数 Update the cell over-temperature protection (OTP) parameters	罗漫 Luo Man	



目录 Table of Contents

规格承认书 Specification	1
产品功能配置表 Product Function Configuration Table	2
文件更改摘要 Document Change Summary	4
一、 简介 Introduction	6
二、 功能特性 Functional Characteristics	6
三、 功能示意框图 Functional Schematic Block Diagram	6
四、 环境要求 Environmental Requirements	7
五、 电气特性 Electrical Characteristics	7
5.1. 基本参数设置 Basic Parameter Settings	7
5.2. LED 指示说明 LED Indication Instructions	11
5.3. 蜂鸣器动作说明 Buzzer Action Instructions	12
5.4. 弱电开关说明 Low-voltage switch Instructions	12
5.5. 休眠及唤醒 Hibernation and Wake-up	12
5.6. 充电限流功能 Charging Current Limiting Function	13
5.7. 加热或散热功能（预留）Heating or Cooling Function (Reserved)	13
六、 通信说明 Communication Instructions	13
6.1. USB 通信 USB Communication	13
6.2. RS485 通信 RS485 Communication	13
6.3. CAN 通信 CAN Communication	13
七、 电磁兼容性 Electromagnetic Compatibility	14
7.1. 静电放电抗扰性 Electrostatic Discharge Immunity	14
7.2. 传导骚扰限值 Conducted Emission Limits	14
7.3. 辐射骚扰限值 Radiated Emission Limits	14
7.4. 浪涌（冲击）抗扰性 Surge (Impact) Immunity	14
八、 接口定义 Interface Definition	15
8.1. 通信接口图示 Communication Interface Diagram	15
8.2. 电气接口定义 Definition of Electrical Interfaces	16
8.3. 安装连接说明 Installation and Connection Instructions	17
九、 协议支持 Protocol Support	19
十、 实物图与尺寸图 Physical Diagram and Dimension Diagram	20
10.1. 主控板标配图 Standard Diagram of Main Control Board	20
10.2. 主板尺寸图 Dimension of Main Board	20
十一、 使用注意事项 Precautions for Use	21
附录 Appendixes	22



一、简介 Introduction


随着铁锂电池在通信行业的广泛应用，对电池管理系统也提出了高性能、高可靠性及高性价比等要求。本产品是专门针对家庭/后备电池设计的 BMS，采用集成化的设计，将采集、管理、通信等功能集成于一体，可广泛应用在室内室外。

With the wide application of lithium iron phosphate batteries in the communication industry, requirements for high performance, high reliability, and high cost-effectiveness are put forward for the battery management system. This product is a BMS specially designed for household/backup batteries. It adopts an integrated design, integrating functions such as acquisition, management, and communication, and can be widely applied indoors and outdoors.

二、功能特性 Functional Characteristics

- 高集成模拟前端
- Highly integrated analog front-end
- 隔离电源电路
- Isolated power supply circuit
- 集成串口IC
- Integrated serial port IC
- 高电压精度 ($\leq 10\text{mV}$)
- High voltage accuracy ($\leq 10\text{mV}$)
- 高电流精度 ($\leq 2\%@\text{FS}$)
- High current accuracy ($\leq 2\%@\text{FS}$)
- 4路电池温度检测 ($\leq 2^\circ\text{C}$)
- 4-way temperature detection ($\leq 2^\circ\text{C}$)
- SOC 估算功能
- SOC estimation function
- SOH 估算功能
- SOH estimation function
- 短路保护功能
- Short-circuit protection function
- 并机数据透传，通过主机可访问任意从机
- Data passthrough for parallel operation: The host can access any slave unit.
- 主动均衡技术
- Active Balancing Technology
- 可调过流保护
- Adjustable overcurrent protection
- 具有多种休眠及唤醒方式
- Multiple hibernation/wake-up modes
- 低功耗
- Low power consumption
- RS485/CAN 通信
- RS485/CAN communication
- 参数可调设置
- Configurable parameters
- 数据刷新时间间隔（周期） ≤ 2 秒
- Data refresh interval (cycle) ≤ 2 seconds
- LED 状态指示功能
- LED status indication function
- 具有充电均衡功能
- Charging equalization function
- SOC 精度 ($\leq 5\% @ 50\%$ 容量量程以上)
- SOC accuracy ($\leq 5\% @ 50\%$ capacity range)
- OTA 可通过主机批量或指定地址升级从机
- OTA (Over-The-Air): The host unit supports batch upgrading of slave units or targeted upgrading of slave units by specified addresses.
- 堆叠式均衡架构
- Stacked Balancing Architecture

三、功能示意框图 Functional Schematic Block Diagram

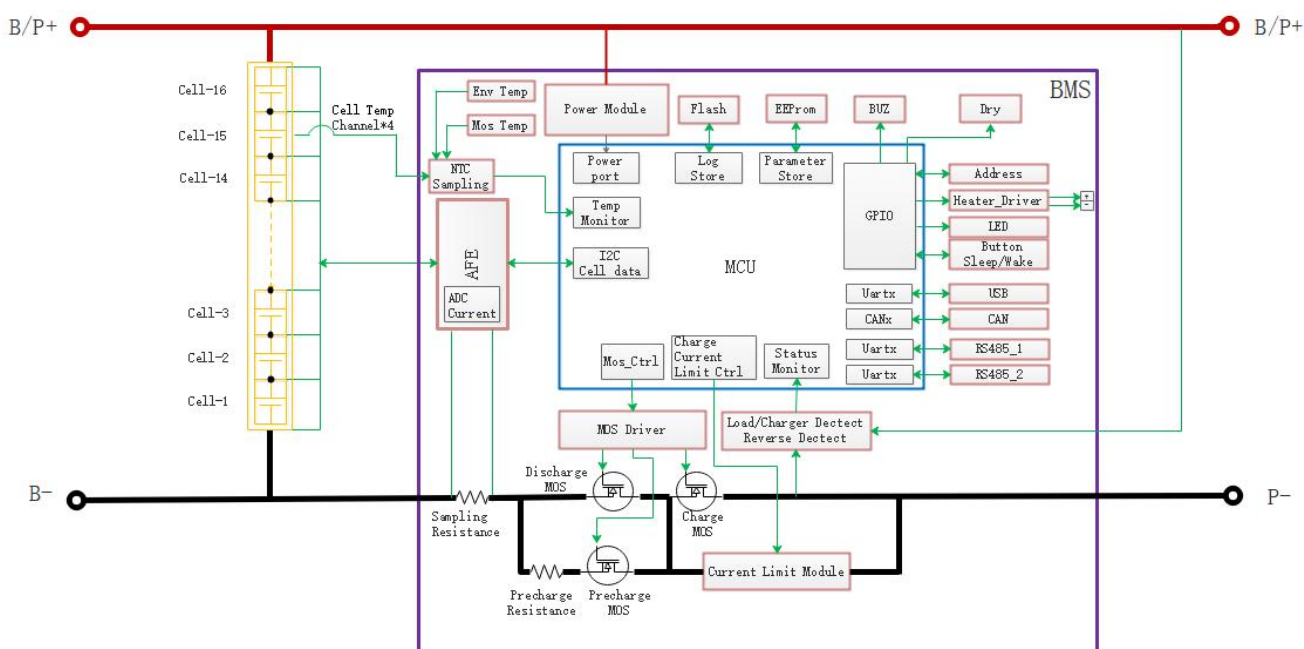



四、环境要求 Environmental Requirements

项目 Item	参数 Parameter	单位 Unit
工作温度 Operating temperature	-20~75	℃
储存温度 Storage temperature	-20~75	℃
工作湿度 Operating humidity	≤85	%RH
储存湿度 Storage humidity	≤95	%RH
温度测量 Temperature measurement	-40~125	℃
大气压力 Atmospheric pressure	70~106	kPa

表4-1 环境要求 Table 4-1 Environmental Requirements

五、电气特性 Electrical Characteristics

5.1. 基本参数设置 Basic Parameter Settings

注：以下参数除特殊注明以外，均为 25℃环境温度下测试。BMS 对单体电池电压测量范围 0~5V，总电压测量范围范围 0~60V。充放电温升均不应超过 75℃

Note: The following parameters are tested at an ambient temperature of 25℃, unless otherwise specified. The voltage measurement range of a single cell by the BMS is 0-5V, and the total voltage measurement range is 0-60V. The temperature rise during charging and discharging should not exceed 75℃.

序号 S/N	指标项目 Index Items		出厂默认参数 Factory Default Parameters	是否可设 Whether Adjustable	备注 Remarks
1	单体过充保护 Single cell overcharge protection	单体过充告警电压 Single cell overcharge alarm voltage	3550±10mV	可设 Yes	
		单体过充保护电压 Single cell overcharge protection voltage	3650mV	可设 Yes	
		单体过充保护延时 Single cell overcharge protection delay	1000mS	可设 Yes	
	单体过压保护解 除 Single cell overvoltage protection release	单体过充保护解除电压 Single cell overcharge protection release voltage	3450±10mV	可设 Yes	
		容量解除Capacity release	SOC≤96%	可设 Yes	
		放电解除Discharge release	放电电流 > 1A Discharging current >1A		
2	单体过放保护 Single cell over-discharge protection	单体过放告警电压 Single cell over-discharge alarm voltage	2700±10mV	可设 Yes	
		单体过放保护电压 Single cell over-discharge protection voltage	2600±10mV	可设 Yes	
		单体过放保护延时 Single cell over-discharge protection delay	2000mS	可设 Yes	
	单体过放保护 解除Single cell over-discharge protection release	单体过放保护解除电压Single cell over-discharge protection release voltage	2800±10mV	可设 Yes	
		有充电时解除Release when charging	接入充电器可激活 Activated when the charger is connected		
	总体过充保护 Overall overcharge	总体过充告警电压Overall overcharge alarm voltage	56.00V	可设 Yes	
		总体过充保护电压Overall overcharge	57.60V	可设	



3	protection	protection voltage		Yes	
		总体过充保护延时Overall overcharge protection delay	1000mS	可设 Yes	
	总体过压保护 解除 Overall overvoltage protection release	总体过充保护解除电压Overall overcharge protection release voltage	54.40V	可设 Yes	
		容量解除Capacity release	SOC≤96%	可设	
		放电解除Discharge release	放电电流 > 1A Discharging current >1A		
4	总体过放保护 Overall over-discharge protection	总体过放告警电压Overall over-discharge alarm voltage	44.00V	可设 Yes	
		总体过放保护电压Overall over-discharge protection voltage	42.40V	可设 Yes	
		总体过放保护延时Overall over-discharge protection delay	2000mS	可设 Yes	
	总体过放保护 解除Overall over-discharge protection release	总体过放保护解除电压Overall over-discharge protection release voltage	45.60V	可设 Yes	
		有充电时解除Release when charging	接入充电器可激活Activated when the charger is connected		
5	充电过流保护 Charging overcurrent protection	充电过流告警电流Charging overcurrent alarm current	205A±1A	可设 Yes	连续出现 10 次, 将锁定该状态, 不再自动解除 If it occurs continuously for 10 times, the state will be locked and will not be automatically released
		充电过流保护电流Charging overcurrent protection current	210A±1A	可设 Yes	
		充电过流保护延时Charging overcurrent protection delay	2000mS	可设 Yes	
	充电过流保护 解除Charging overcurrent protection release	自动解除 Automatically release	充电电流 < 200A 5min 后自动解除Automatically release when the charging current is < 150A for 5 minute		
		放电解除Discharge release	放电电流 > 1A Discharging current >1A		
6	放电过流1保护 Discharging overcurrent 1 protection	放电过流1告警电流 Discharging overcurrent 1 alarm current	205±1A	可设 Yes	连续出现 3 次, 将锁定该状态, 不再自动解除 If it occurs continuously for 3 times, the state will be locked and will not be automatically released
		放电过流1保护电流 Discharging overcurrent 1 protection current	215±1A	可设 Yes	
		放电过流1保护延时 Discharging overcurrent 1 protection delay	1000mS	可设 Yes	
	放电过流 1 保护解除 Discharging overcurrent 1 protection release	自动解除Automatically release	放电电流 < 200A 5min 后自动解除 Automatically release when the discharging current is < 150A for 5 minutes		
		充电解除Charging release	充电电流 > 1A Charging current > 1A		
7	放电过流2保护 Discharging overcurrent 2 protection	放电过流2保护电流Discharging overcurrent 2 protection current	225A	可设 Yes	出现 3 次将锁定该状态, 不再自动解除 If it occurs continuously
		放电过流2保护延时Discharging overcurrent 2 protection delay	1000mS	可设 Yes	
	放电过流 2	自动解除Automatically release	——		



	保护解除 Discharging overcurrent 2 protection release	充电解除Charging release	充电电流 > 1A Charging current > 1A		for 3 times, the state will be locked and will not be automatically released
8	反接保护Reverse connection protection	— —	无法自动解除，必须关机重启 Cannot be automatically released, and the device must be shut down and restarted		
9	短路保护 Short-circuit protection	短路保护功能 Short-circuit protection function	有Yes		连续出现 5 次 将锁定 该状态，不再自动解除 If it occurs continuously for 5 times, the state will be locked and will not be automatically released
		短路保护解除 Short-circuit protection release	1min后，短路保护解除 Short-circuit protection will be released after 1 minute		
10	MOS 高温保护MOS high temperature protection	MOS 高温告警温度MOS high temperature alarm temperature	90℃	可设 Yes	
		MOS 高温保护温度MOS high temperature protection temperature	115℃	可设 Yes	
		MOS 保护解除温度 MOS protection release temperature	50℃	可设 Yes	
11	电芯温度保护Cell temperature protection	充电低温告警温度 Charging low temperature alarm temperature	5℃	可设 Yes	
		充电低温保护温度 Charging low temperature protection temperature	0℃	可设 Yes	
		充电低温保护解除温度 Charging low temperature protection release temperature	5℃	可设 Yes	
		充电高温告警温度Charging high temperature alarm temperature	55℃	可设 Yes	
		充电高温保护温度Charging high temperature protection temperature	65℃	可设 Yes	
		充电高温保护解除温度Charging high temperature protection release temperature	50℃	可设 Yes	
		放电低温告警温度Discharging low temperature alarm temperature	-10℃	可设 Yes	
		放电低温保护温度Discharging low temperature protection temperature	-20℃	可设 Yes	
		放电低温保护解除温度Discharging low temperature protection release temperature	-10℃	可设 Yes	
		放电高温告警温度Discharging high temperature alarm temperature	55℃	可设 Yes	
		放电高温保护温度Discharging high temperature protection temperature	65℃	可设 Yes	
		放电高温保护解除温度Discharging high temperature protection release temperature	50℃	可设 Yes	
		环境低温告警温度Ambient low temperature alarm temperature	-10℃	可设 Yes	
		环境低温保护温度Ambient low temperature protection temperature	-20℃	可设 Yes	



12	环境温度告警 Ambient temperature alarm	环境低温保护解除温度Ambient low temperature protection release temperature	-10℃	可设 Yes	
		环境高温告警温度Ambient high temperature alarm temperature	60℃	可设 Yes	
		环境高温保护温度Ambient high temperature protection temperature	70℃	可设 Yes	
		环境高温保护解除温度 Ambient high temperature protection release temperature	50℃	可设 Yes	
13	消耗电流 Consumption current	工作时自耗电电流 Self-consumption current during operation	≤15mA		
		低功耗模式电流 Low power consumption mode current	≤1mA		
14	均衡功能 Equalization function	均衡开启电压 Equalization activation voltage	3400mV	可设 Yes	单体间压差大于1V时，不应启动均衡 When the voltage difference between single cells is greater than 1V, the equalization should not be started
		开启压差 Activation voltage difference	50mV	可设 Yes	
15	容量默认设置 Capacity default setting	低电量告警Low battery alarm	SOC<5%	可设 Yes	充电时不告警 No alarm during charging
16	休眠功能 Hibernation function	休眠电压Hibernation voltage	2600mV	可设 Yes	
		延迟时间Delay time	10min	可设 Yes	
17	电芯失效保护Cell failure protection	单体压差Voltage difference between single cells	压差>800mV		不允许充放电 Charging and discharging are not allowed
18	满充判断 Full charge judgment	满充电压Full charge voltage	58.4V		
		截止电流Cut-off current	0. 5A		
19	主动均衡 Active Balancing	均衡开启电压 Balancing Activation Voltage	3400mV	可设 Yes	
		均衡开启压差 Balancing Activation Voltage Difference	20mV	可设 Yes	
		均衡电流 Balancing Current	2A (最大支持3.75A)	可设 Yes	
		均衡通信方式 Balancing Communication Method	单总线接口：一根控制线支持最多 33 节电芯通信，节省 IO 口 Single-bus interface: one control line supports communication for up to 33 battery cells, saving I/O ports		过温后禁止开均衡 Balancing is disabled after over-temperature
		均衡过温保护温度 Balancing Over-temperature Protection Temperature	80℃	不可设	
		均衡过温保护解除温度 Balancing Over-temperature Protection Reset Temperature	70℃	不可设	
		均衡欠温保护温度Balancing Under-temperature Protection Temperature	0℃	不可设	



		均衡欠温保护解除温度 Balancing Under-temperature Protection Reset Temperature	10℃	不可设	disabled after under-temperature
--	--	---	-----	-----	-------------------------------------

表5-1 参数配置 Table 5-1 Parameter Configuration

5.2. LED 指示说明 LED Indication Instructions

闪灯方式定义 Definition of flashing mode

备注：可通过上位机使能或禁止 LED 指示灯告警，出厂默认为使能的。

Note: The LED indicator light alarm can be enabled or disabled through the Host computer, and it is enabled by default when leaving the factory.

运行方式 Operation mode	亮(秒) On (seconds)	灭(秒) Off (seconds)
闪1 Flash 1	0.5	3.5
闪2 Flash 2	0.5	0.5
闪3 Flash 3	0.5	1.5

表5-2 闪灯模式 Table 5-2 Flashing Mode

5.2.1. 4个SOC指示灯 SOC indicator lights

各个状态下的闪灯方式定义 Definition of the flashing mode in various states:

状态 Status	正常/告警/保护 Normal/Alarm/Protection	运行灯 Operation Light	告警灯 Alarm Light	电量灯 SOC Lights						备注 Remarks
				25%	50%	75%	100%	—	—	
关机 Shutdown	休眠 Hibernation	灭 Off	灭 Off	灭 Off	灭 Off	灭 Off	灭 Off			
待机 Standby	正常 Normal	闪1 Flash 1	灭 Off	依据电量指示 According to the power indication						待机状态 On standby
	告警 Alarm	闪1 Flash 1	闪3 Flash 3							所有告警和保护 (不包括过充告警和保护) (Excluding overcharge alarm and protection)
失效 Failure	电芯故障 Cell failure	闪2 Flash 2	闪2 Flash 2	闪2 Flash 2	灭 Off	灭 Off	灭 Off			停止充放电 Stop charging and discharging
	充放电MOS故障 Charging and discharging MOS failure	闪2 Flash 2	闪2 Flash 2	灭 Off	闪2 Flash 2	灭 Off	灭 Off			停止充放电 Stop charging and discharging
	AFE故障 AFE failure	闪2 Flash 2	闪2 Flash 2	灭 Off	灭 Off	闪2 Flash 2	灭 Off			停止充放电 Stop charging and discharging
	电流采样电阻故障 Current sampling resistor failure	闪2 Flash 2	闪2 Flash 2	灭 Off	灭 Off	灭 Off	闪2 Flash 2			停止充放电 Stop charging and discharging
	电压故障 Voltage failure	闪2 Flash 2	闪2 Flash 2	灭 Off	灭 Off	灭 Off	灭 Off			停止充放电 Stop charging and discharging
	反接故障 Reverse connection failure	闪2 Flash 2	闪2 Flash 2	灭 Off	灭 Off	灭 Off	灭 Off			停止充放电 Stop charging and discharging
	短路 Short circuit	闪2 Flash 2	闪2 Flash 2	闪2 Flash 2	闪2 Flash 2	闪2 Flash 2	闪2 Flash 2			停止充放电 Stop charging and discharging

表 5-3 4SOC 闪灯含义 Table 5-3 Meaning of Flashing



状态Status	充电Charging				放电Discharging			
容量指示灯 Capacity indicator light	LED1	LED2	LED3	LED4	LED1	LED2	LED3	LED4
0%~25%	闪2 Flash 2	灭 Off	灭 Off	灭 Off	常亮 Normally on	灭 Off	灭 Off	灭 Off
25%~50%	常亮 Normally on	闪2 Flash 2	灭 Off	灭 Off	常亮 Normally on	常亮 Normally on	灭 Off	灭 Off
50%~75%	常亮 Normally on	常亮 Normally on	闪2 Flash 2	灭 Off	常亮 Normally on	常亮 Normally on	常亮 Normally on	灭 Off
75%~100%	常亮 Normally on	常亮 Normally on	常亮 Normally on	闪2 Flash 2	常亮 Normally on	常亮 Normally on	常亮 Normally on	常亮 Normally on
—								
运行灯 Operation Light	常亮Normally on				闪3 Flash 3			

表5-4 4S0C容量表现方式 Table 5-4 Capacity Representation Method

5. 3. 蜂鸣器动作说明 Buzzer Action Instructions

- (1) 开机上电，蜂鸣器长鸣一声； **When powering on, the buzzer emits a long beep;**
- (2) 关机休眠，蜂鸣器短鸣一声； **When shutting down and hibernating, the buzzer emits a short beep;**
- (3) 短路保护时，蜂鸣器每隔 2S 鸣叫一声，短路保护 3 次锁定后，蜂鸣器不再鸣叫；蜂鸣器功能可通过上位机使能或禁止，出厂默认是禁止的；
In case of short-circuit protection, the buzzer beeps every 2 seconds. After the short-circuit protection is locked for 3 times, the buzzer stops beeping; The buzzer function can be enabled or disabled through the Host computer, and it is disabled by default when leaving the factory;
- (4) 蜂鸣器功能禁止时，在保护板告警和保护时（短路和反接保护除外），蜂鸣器不工作；
When the buzzer function is disabled, the buzzer does not work when the protection board gives an alarm and protection (excluding short-circuit and reverse connection protection);

5. 4. 弱电开关说明 Low-voltage switch Instructions

- (1) 当弱电开关常闭状态，BMS 保护板正常工作。**When the low-voltage switch is in the normally closed state, the BMS protection board works normally.**
- (2) 当弱电开关常开状态，BMS 保护板关机。**When the low-voltage switch is in the normally open state, the BMS protection board shuts down.**

5. 5. 休眠及唤醒 Hibernation and Wake-up

5. 5. 1. 休眠 Hibernation

为了降低整个系统的功耗，系统具有休眠功能，当满足以下条件时，系统将进入休眠模式：
To reduce the power consumption of the entire system, the system has a hibernation function. When the following conditions are met, the system will enter the hibernation mode:

- (1) 单体过放保护 5 分钟仍未解除（可设置）。
The single cell overdischarge protection has not been released within 5 minutes (can be set).
- (2) 待机状态持续时间达到 24 小时（无通讯、无充放电、无充电机接入，可设置）。
The standby state lasts for 24 hours (no communication, no charging or discharging, no charger connected, can be set)

5. 5. 2. 唤醒 Wake-up

结合实际情况，为了方便使用，系统提供了多种不同的唤醒方式：
Combined with the actual situation, for the convenience of use, the system provides multiple different wake-up methods:

- (1) 充电唤醒：接入充电器，充电机电压大于 36V；
Charging wake-up: Connect the charger, and the charger voltage is greater than 36V;
- (2) 自动唤醒：自动唤醒使能，且配置时间大于 0，非按键手动关机或者低电量关机；



Automatic wake-up: The automatic wake-up is enabled, and the configured time is greater than 0, and it is not manually shut down by the button or shut down due to low battery;

5. 6. 充电限流功能 Charging Current Limiting Function

(1) 保护板具有充电限流功能, 充电限流为 $10 \pm 1A$, 用户可通过上位机设置限流启动条件和限流功能的开启和关闭。

The protection board has a charging current limiting function, and the charging current limiting is $10 \pm 1A$. The user can set the current limiting activation condition and the on/off of the current limiting function through the Host computer.

(2) 充电限流默认启动条件为充电电流大于 180A(可设置), 进入限流模式后, 充电电流小于 2A, 或者 10 分钟后自动退出限流模式。

The default activation condition for charging current limiting is that the charging current is greater than 180A (can be set). After entering the current limiting mode, it will automatically exit the current limiting mode when the charging current is less than 2A or after 10 minutes.

5. 7. 加热或散热功能(预留) Heating or Cooling Function (Reserved)

(1) 保护板预留充放电加热控制功能(默认不提供), BMS 实时监控电芯温度, 当电芯温度最小值低于加热开启温度时, 保护板启动加热功能, 当所有电芯温度达到加热关闭温度时, 加热功能关闭;

The protection board reserves the charging and discharging heating control function (not provided by default). The BMS monitors the cell temperature in real time. When the minimum value of the cell temperature is lower than the heating activation temperature, the protection board activates the heating function. When the temperature of all cells reaches the heating shutdown temperature, the heating function is turned off.

(2) 保护板预留充放电散热控制功能(默认不提供), BMS 实时监控电芯温度, 当电芯温度最高值大于散热开启温度时, 保护板启动散热功能, 当所有电芯温度达到散热关闭温度时, 散热功能关闭;

The protection board reserves the charging and discharging cooling control function (not provided by default). The BMS monitors the cell temperature in real time. When the maximum value of the cell temperature is greater than the cooling activation temperature, the protection board activates the cooling function. When the temperature of all cells reaches the cooling shutdown temperature, the cooling function is turned off.

(3) 加热功能最大输出电流为 3A, 即 48V 时最大负载能力为 150W;

The maximum output current of the heating function is 3A, that is, the maximum load capacity at 48V is 150W.

(4) 加热与散热功能共用一个控制输出脚, 同时只能提供其中一种功能(默认是加热), 可以通过用户特性配置该控制脚的功能。

The heating and cooling functions share a control output pin, and only one of the functions can be provided at the same time (heating is provided by default), and the function of this control pin can be configured according to user characteristics.

六、通信说明 Communication Instructions

6. 1. USB 通信 USB Communication

USB 接口采用 TYPE B 端口, BMS 可以通过该接口与上位机进行通讯, 从而在上位机端监控电池的各种信息, 包括电池电压、电流、温度、状态、SOC、SOH 及电池生产信息等, 默认波特率为 115200bps。

The USB interface adopts the TYPE B port. The BMS can communicate with the Host computer through this interface, so as to monitor various information of the battery at the Host computer end, including battery voltage, current, temperature, status, SOC, SOH and battery production information, etc. The default baud rate is 115200bps.

6. 2. RS485 通信 RS485 Communication

具有 1 路 RS485 接口, 为单端 RJ45 网络端口, 主要用于电池组与逆变器间的数据交互, 默认波特率为 9600bps。

It has 1 RS485 interface, which is a single-ended RJ45 network port and is mainly used for data interaction between the battery pack and the inverter. The default baud rate is 9600bps.

6. 3. CAN 通信 CAN Communication



具有 2 路 CAN 通信接口 It has 2 CAN communication interfaces:

6.3.1. CAN-1 为单端 RJ45 网络端口，主要用于电池组与逆变器间的数据交互，默认波特率为 500K；

CAN-1 is a single-ended RJ45 network port, which is mainly used for data interaction between the battery pack and the inverter. The default baud rate is 500K;

6.3.2. CAN-2 为双端 RJ45 网络端口，用于电池组的级联并机之间的数据交互，目前并机接口最多可支持 32 组电池进行并机操作。

CAN-2 is a double-ended RJ45 network port, which is used for data interaction between cascaded parallel battery packs. Currently, the parallel connection interface can support up to 32 groups of batteries for parallel connection operation.

七、电磁兼容性 Electromagnetic Compatibility

7.1. 静电放电抗扰性 Electrostatic Discharge Immunity

满足 GB/T 17626.2-2018 等级 4 的要求，接触 8kV，空气 15kV；试验后能正常工作。

It meets the requirements of Grade 4 in GB/T 17626.2-2018, with a contact voltage of 8kV and an air voltage of 15kV; It can work normally after the test.

7.2. 传导骚扰限值 Conducted Emission Limits

满足传导骚扰限值应符合表 7-1 的要求（引自 GB 9254-2008 中第 5.1 条中表 1）；试验后能正常工作。

It meets the requirements of the conducted emission limits as specified in Table 7-1 (quoted from Table 1 in Article 5.1 of GB9254-2008); It can work normally after the test.

频率范围 / MHz Frequency Range / MHz	限值 Limit / dB(μV)	
	准峰值 Quasi-peak Value	平均值 Average Value
0.15~0.50	79	66
0.50~30	73	60

表 7-1 传导骚扰限值 Table 7-1 Conducted Emission Limits

7.3. 辐射骚扰限值 Radiated Emission Limits

满足辐射骚扰限值应符合表 7-2 的要求（引自 GB 9254-2008 中第 6.1 条中表 5）；试验后能正常工作。

It meets the requirements of the radiated emission limits as specified in Table 7-2 (quoted from Table 5 in Article 6.1 of GB9254-2008); It can work normally after the test.

频率范围 / MHz Frequency Range / MHz	准峰值限值 / dB(μV / m) Quasi-peak Value Limit / dB(μV/m)
30~230	40
230~1000	47

表 7-2 辐射骚扰限值 Table 7-2 Radiated Emission Limits

7.4. 浪涌（冲击）抗扰性 Surge (Impact) Immunity

通信端口和电源端口应采用相应的隔离措施，通信端口线对线应满足 GB/T 17626.5-2019 等级 2（开路试验电压 0.5kV）的要求，线对地应满足 GB/T 17626.5-2019 等级 2（开路试验电压 1kV）的要求；电源端口线对线应满足 GB/T 17626.5-2019 等级 4（开路试验电压 2kV）的要求，线对地应满足 GB/T 17626.5-2019 等级 4（开路试验电压 4kV）的要求。


Corresponding isolation measures should be adopted for the communication port and the power port. The line-to-line of the communication port should meet the requirements of Grade 2 in GB/T 17626.5-2019 (open-circuit test voltage of 0.5kV), and the line-to-ground should meet the requirements of Grade 2 in GB/T 17626.5-2019 (open-circuit test voltage of 1kV); The line-to-line of the power port should meet the requirements of Grade 4 in GB/T 17626.5-2019 (open-circuit test voltage of 2kV), and the line-to-ground should meet the requirements of Grade 4 in GB/T 17626.5-2019 (open-circuit test voltage of 4kV).



八、接口定义 Interface Definition

8.1. 通信接口图示 Communication Interface Diagram


8.1.1. USB 通讯端口定义（接上位机） Definition of USB communication port (connected to the Host computer)



接口 Interface	定义说明 Definition Description	
X7 通讯端口定义 Definition of the communication port	PIN 1	VBUS
	PIN 2	D-
	PIN 3	D+
	PIN 4	GND

表 8-1 USB 端口定义 Table 8-1 Definition of the USB Port

8.1.2. CAN-2 通讯接口定义 Definition of the CAN-2 Communication Interface




接口 Interface	定义说明 Definition Description			定义说明 Definition Description		
X2 通讯端口定义 Definition of the communication port	A 部分 Part A CAN-2并机 Parallel connection of CAN-2 OUT接口 OUT interface	PIN 1	CAN2-L	B 部分 Part B CAN-2并机 Parallel connection of CAN-2 IN接口 IN interface	PIN 1	CAN2-L
		PIN 2	CAN2-H		PIN 2	CAN2-H
		PIN 3	NC(空 empty)		PIN 3	NC(空 empty)
		PIN 4	NC(空 empty)		PIN 4	NC(空 empty)
		PIN 5	自动编址 OUT-P Automatic addressing OUT-P		PIN 5	自动编址 IN-P Automatic addressing IN-P
		PIN 6	自动编址 OUT-N Automatic addressing OUT-N		PIN 6	自动编址 IN-N Automatic addressing IN-N
		PIN 7	NC(空 empty)		PIN 7	NC(空 empty)
		PIN 8	NC(空 empty)		PIN 8	NC(空 empty)

表 8-2 CAN-2 端口定义 Table 8-3 Definition of the CAN-2 Port



8.1.3. RS485 & CAN-1 通讯接口定义 Definition of the RS485&CAN-1 Communication Interface



接口 Interface	定义说明 Definition Description		定义说明 Definition Description			
X1 通讯端口定义 Definition of the communication port	A 部分 Part A CAN-1接口 CAN-1 interface	PIN 1	NC(空 empty)	B 部分 Part B RS485接口 RS485 interface	PIN 1	RS485-B
		PIN 2	NC(空 empty)		PIN 2	RS485-A
		PIN 3	CGND		PIN 3	RS485-GND
		PIN 4	CAN1-H		PIN 4	NC(空 empty)
		PIN 5	CAN1-L		PIN 5	NC(空 empty)
		PIN 6	CGND		PIN 6	RS485-GND
		PIN 7	NC(空 empty)		PIN 7	RS485-A
		PIN 8	NC(空 empty)		PIN 8	RS485-B

8.2. 电气接口定义 Definition of Electrical Interfaces

接口 Interface	定义说明 Definition Description	
B+	BMS 供电端子, 接电池组 B+ (总正) BMS power supply terminal, connected to B+ (total positive) of the battery pack	
B-	接电池组 B- (总负) Connected to the negative terminal (total negative) of the battery pack B	
P-	接充电器或者负载的负端 (P-) Connected to the negative terminal (P-) of the charger or load	
CN1(1#) 电芯电压检测接口: 1 Cell voltage detection interface: 1	接口 Interface	定义 Definition
	CN1-1	B0 (黑色线) B0 (black wire)
	CN1-2	B1+
	CN1-3	B2+
	CN1-4	B3+
	CN1-5	B4+
	CN1-6	B5+
	CN1-7	B6+
	CN1-8	B7+
	CN1-9	B8+
CN2(2#) 电芯电压检测接口: 2 Cell voltage detection interface: 2	接口 Interface	定义 Definition
	CN2-1	B9- (黑色线) B9- (black wire)
	CN2-2	B9+
	CN2-3	B10+
	CN2-4	B11+
	CN2-5	B12+
	CN2-6	B13+
	CN2-7	B14+
	CN2-8	B15+
	CN2-9	B16+
	CN2-10	NC(悬空)
CN3 电芯温度检测接口 Cell Cell temperature detection interface	接口 Interface	定义 Definition
	CN3-1	NTC1+
	CN3-2	NTC1-
	CN3-3	NTC2+
	CN3-4	NTC2-
	CN3-5	NTC3+



X5 电加热插座（预留） Electrical heating socket (Reserved)	CN3-6	NTC3-
	CN3-7	NTC4+
	CN3-8	NTC4-
	接口 Interface	定义 Definition
	X5-1	HEAT（加热控制正端） HEAT (Positive terminal of heating control)
	X5-2	P-(加热控制负端) P- (Negative terminal of heating control)

表 8-3 采样线端口定义 Table 8-5 Definition of the Sampling Wire Port

8.3. 安装连接说明 Installation and Connection Instructions


8.3.1. 保护板安装和拆除 Installation and removal of the protection board

保护板上电有严格的顺序要求，先焊接 B-、P-、B+、P+，依次由低到高的顺序插接电池采样线连接器，上电后需要充电或按键激活。所有连接线安装好后才能加负载或充电器。

There are strict sequential requirements for powering on the protection board. First, weld B-, P-, B+, and P+. Then, insert the battery sampling wire connectors in ascending order. After powering on, it needs to be charged or activated by pressing a button. Load or charger can be added only after all connection wires are installed.

拆除时，先拔掉充电器或负载，依次由高到低的顺序拆卸电池采样线连接器，最后拆卸 B+、P+、B-、P-。PACK 组装安装示意图如下：

When removing, first unplug the charger or load, then remove the battery sampling wire connectors in descending order, and finally remove B+, P+, B-, and P-. The PACK Assembly Installation Schematic is shown below:

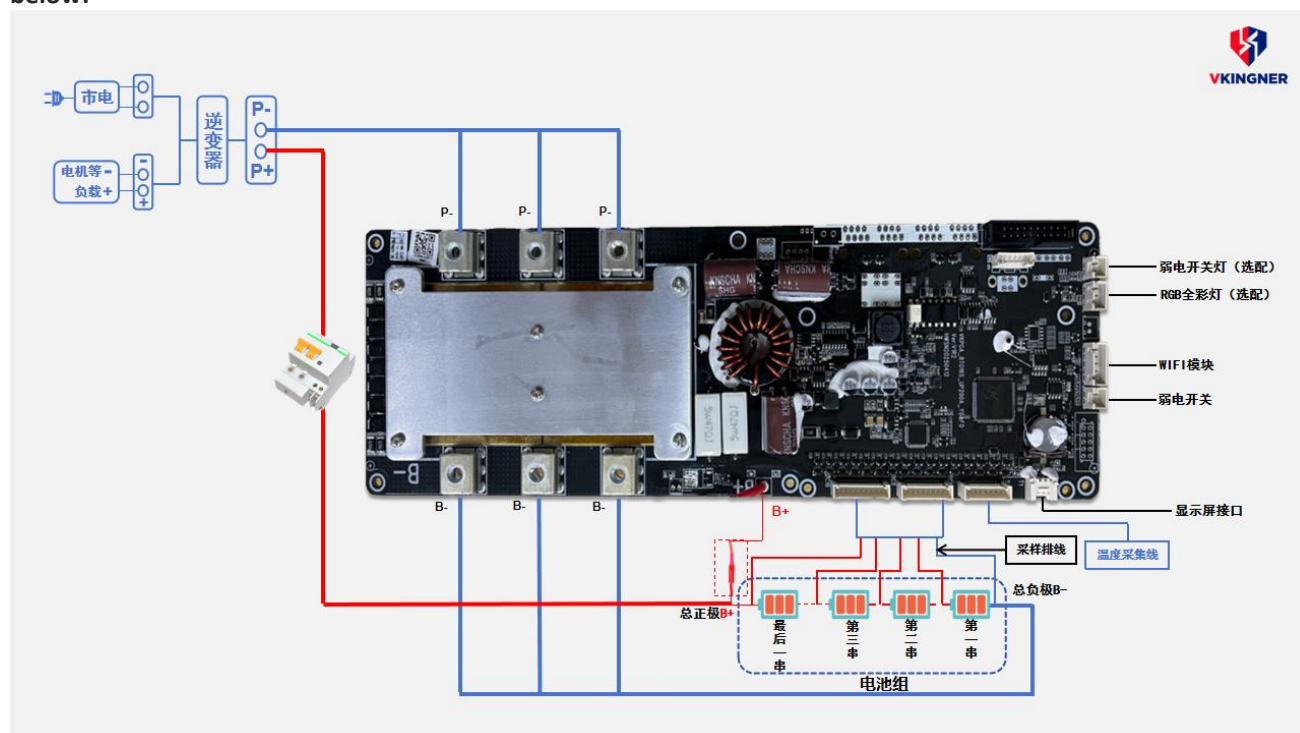

8.3.2. 并机接线安装 Installation of parallel connection wiring

电池包并机接线示意图如下图 8-1 所示

The wiring schematic diagram for parallel connection of battery packs is as shown in Figure 8-1:

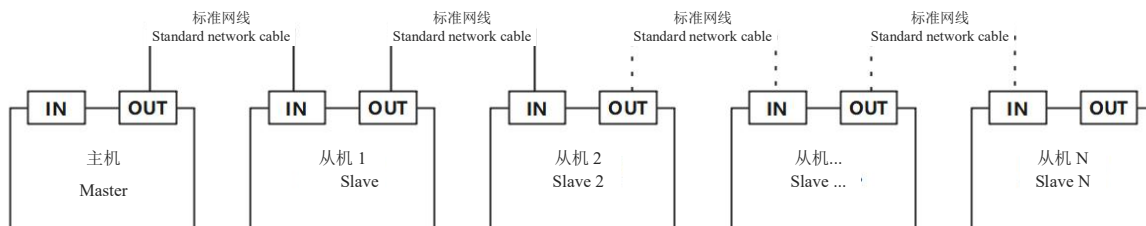


图 8-1 并机接线示意图 Fig. 8-1 Schematic Diagram of Parallel Connection Wiring

CAN 总线为了提高通讯的稳定性，需要在主机的输入和最后一级从机的输出端口接终端电阻（根据现场接线的实际 CAN 总线阻抗而定，典型值为：120Ω）。从 V1R5 版本开始的硬件新增了自动控制末端电阻通断的功能，并机时主机可以根据从机数量自动计算需要接入的末端电阻数量，并控制指定从机的末端电阻的接入或断开。

In order to improve the communication stability of the CAN bus, a terminal resistor needs to be connected to the input of the master and the output port of the last-level slave (determined according to the actual CAN bus impedance of the on-site wiring, with a typical value of 120Ω). Starting from the hardware of the V1R5 version, the function of automatically controlling the on/off of the terminal resistor is newly added. When making parallel connections, the master can automatically calculate the number of terminal resistors to be connected according to the number of slaves, and control the connection or disconnection of the terminal resistors of the specified slaves.

并机接线完毕后，建议所有的设备一同上电开机。如果不能同时开机，则应先开启主机，然后按级联顺序依次开启所有从机（上电顺序会影响从机地址绑定的连续性，所以尽量按级联顺序靠近主机的主机先上电），现在默认的最大从机数量上限为 32。

After the parallel connection wiring is completed, it is recommended to power on all devices. If the devices cannot be powered on simultaneously, the master should be turned on first, and then all the slaves should be turned on one by one in the cascading order (the power-on sequence will affect the continuity of the slave address binding, so it is advisable to power on the slaves closest to the master in the cascading order first). Currently, the default maximum number of slaves is 32.



九、协议支持 Protocol Support

如第 6 章所述，本保护板的 RS485 和 CAN 通信端口可支持多种逆变器协议，具体协议详见下表；

As described in Chapter 6, the RS485 and CAN communication ports of this protection board can support multiple inverter protocols, and the specific protocols are shown in the following table;

如有新协议需求，可联系公司技术人员定制。If there are new protocol requirements, you can contact the company's technicians for customization.

协议 Protocol	缩写 Abbreviation	中文名 Chinese Name	RS485 可用 RS485 Available	版本 Version	CAN 可用 CAN Available	版本 Version
NONE	"NONE"		是Yes	0.0	是Yes	0.0
VKING	"VKIN"	问鼎	是Yes	1.0	是Yes	1.0
VOLTRONIC	"VLTC"	日月元	是Yes	1.0		
GROWATT	"GRWT"	古瑞瓦特	是Yes	2.01	是Yes	1.5
SOLAX	"SOLX"	艾罗	是Yes	1.2	是Yes	1.2
LTW	"LTW"	力通威				
PACE	"PACE"	沛城	是Yes	1.3		
MUST	"MUST"	美世乐	是Yes	1.1	是Yes	1.0
SRNE	"SRNE"	硕日	是Yes	1.0		
SMK	"SMK"		是Yes			
AFORE	"AFOR"	艾伏	是Yes	1.0	是Yes	2.1
GOODWE	"GDWE"	固德威			是Yes	1.5
SOFAR	"SOFA"	首航			是Yes	1.0
LUXPOWER	"LXPR"	鹏城			是Yes	1.0
VICTRON	"VICT"				是Yes	1.0
PYLON	"PYLN"	派能	是Yes	1.0	是Yes	1.2, 2.0
SOROTEC	"SRTC"	索瑞德			是Yes	1.0
SMA	"SMA"				是Yes	1.0
GINLONG	"GNLG"	锦浪			是Yes	1.0
DONNERGY	"DONN"	大能			是Yes	1.0
SOLARFAM	"SLFM"					
IMEON	"IMON"				是Yes	1.0
SCHNEIDER	"SHDR"	施耐德			是Yes	2.0
GENIXGREEN	"GENI"		是Yes (VKING)	1.0	是Yes	1.0, 3.0
INHENERGY	"INHE"	银河耐吉			是Yes	1.0
BITTA	"BITA"	比瓦特	是Yes	1.1		
STONE	"STON"	石头	是Yes	2.1		
SENERGY	"SENR"	盛能杰			是Yes	1.2
SUNWAYS	"SNWY"	尚唯斯			是Yes	2.0
STUDER	"STDR"				是Yes	1.0
EVEPER	"EPVR"	汇能精电	是Yes	1.5		
INVT	"INVT"	英威腾			是Yes	1.2
KSTAR	"KSTR"	科士达	是Yes	5.0	是Yes	1.18
SUNFLY	"SNFL"	昇辉	是Yes	1.2		
DEYE	"DEYE"	德业			是Yes	1.0
ALTENERGY	"AEPS"	昱能			是Yes	1.6
SUNGROW	"SNGR"	阳光电源			是Yes	1.0





十、实物图与尺寸图 Physical Diagram and Dimension Diagram

10.1. 主控板标配图 Standard Diagram of Main Control Board



图 10-1 主板标配实物图-正面 Fig.10-1 Physical Diagram of the Standard Configuration of the Main Board - Front



图 10-2 主板标配实物图-反面 Fig.10-2 Physical Diagram of the Standard Configuration of the Main Board - Back

10.2. 主板尺寸图 Dimension of Main Board

尺寸 Dimension: 300(L)*100(W) (单位 Unit: mm)

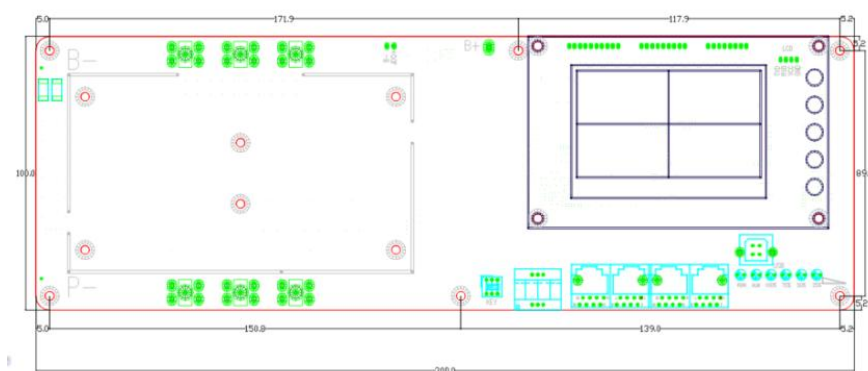


图 10-3 主板尺寸图 Fig. 10-3 Dimension Diagram of the Main Board



十一、使用注意事项 Precautions for Use

● 焊接电池引线时，一定不可有错接或反接。如果确实已接错，这块电路板可能已损坏，需要重新测试合格后才可使用。When welding the battery lead wires, there must be no wrong connection or reverse connection. If it is indeed wrongly connected, this circuit board may be damaged and can only be used after being retested and passing the test.

● 装配时保护板不要直接接触到电芯表面，以免损坏电芯。正确的装配步骤为，先接电池组 B-线，再接上温度采样线，显示屏连接线，然后将电池电压采样线，从低到高，按顺序依次接上，最后接上电池组 B+线。拆除 BMS 时，请按照相反的顺序操作。During assembly, the protection board should not directly contact the surface of the battery cells to avoid damaging the cells. The correct assembly steps are to first connect the B- wire of the battery pack, then connect the temperature sampling wire and the display connection wire, then connect the battery voltage sampling wire in ascending order, and finally connect the B+ wire of the battery pack. When removing the BMS, please operate in the reverse order.

● 使用中注意引线头、烙铁、焊锡等不要碰到电路板上的元器件，否则有可能损坏本电路板。

During use, pay attention that the lead wire heads, soldering irons, solder, etc. should not touch the components on the circuit board, otherwise this circuit board may be damaged.

使用过程要注意防静电、防潮、防水等。Pay attention to preventing static electricity, moisture, water, etc. during use.

● 使用过程中请遵循设计参数及使用条件，不得超过本规格书中的值，否则有可能损坏保护板。

During use, please follow the design parameters and usage conditions, and do not exceed the values specified in this manual, otherwise the protection board may be damaged.

● 将电池组和保护板组合好以后，初次上电如发现无电压输出或充不进电，请检查接线是否正确。

● After assembling the battery pack and the protection board, if there is no voltage output or the battery cannot be charged during the initial power-on, please check whether the wiring is correct.

● 主动均衡功能默认随 BMS 上电启动，无需额外激活，可通过上位机查看均衡状态及调整参数；

By default, the active balancing function starts up automatically when the BMS is powered on; no additional activation is required, and the balancing status can be checked and parameters adjusted via the host computer.

● 均衡芯片集成看门狗功能，若出现通信异常，将自动重启均衡模块，确保功能稳定性。

The balancing chip integrates a watchdog function; in case of communication abnormality, it will automatically restart the balancing module to ensure functional stability.

● 部分线缆，螺丝，螺母等配件需要客户行采购，以下列表供参考：

Some accessories such as cables, screws, and nuts need to be purchased by the customer. The following list is for reference:

序号 S/N	名称 Name	状态 Status	备注 Remarks
1	上位机通讯线（打印机通讯线） Communication cable for the Host computer (Printer communication cable)	需要客户自行采购 To be purchased by the customer	
2	RS485-1 通信接线 RS485-1 communication wiring	需要客户自行采购 To be purchased by the customer	
3	CAN-1 通信接线 CAN-1 communication wiring	需要客户自行采购 To be purchased by the customer	
4	CAN-2 通信接线 CAN-2 communication wiring	需要客户自行采购 To be purchased by the customer	标准网线 Standard network cable
5	干接点通信接线 Dry contact communication wiring	需要客户自行采购 To be purchased by the customer	
6	主板固定螺丝，螺母 Set screws and nuts for the main board	需要客户自行采购 To be purchased by the customer	
7	B-,P-节点固定螺丝，螺母 Set screws and nuts for the B- and P- nodes	需要客户自行采购 To be purchased by the customer	
8	上位机通讯线（打印机通讯线） Host Computer Communication Cable (Printer Communication Cable)	需要客户自行采购 To be purchased by the customer	

表 11-1 客户自行采购配件说明 Appendix 11-1 Instructions for Accessories Purchased by the Customer



附录 Appendixes

附表 1：选配件清单 Appendix: 1 List of Optional Accessories

序号 S/N	名称 Name	型号 Model	备注 Remarks
1	显示屏 Display screen	各尺寸触摸功能LCD显示屏 Touchscreen LCD displays (various sizes)	需定制软硬件 Customized hardware and software are required
2	WIFI模块 WIFI module	提供WIFI功能和云平台功能 Provide WIFI function and cloud platform function	
3	加热功能 Heating function	提供电池供电加热膜接口，控制开启关闭 Provide an interface for the battery-powered heating film and control the on and off	需定制软硬件 Customized hardware and software are required
4	二次保护 Secondary protection	提供电池供电继电器接口，实现二次保护功能 Provide an interface for the battery-powered relay to achieve the secondary protection function	需定制软硬件 Customized hardware and software are required
5	支持低串电芯 Support low-series battery cells	支持8~15串电芯电池包 Support battery packs with 8 to 15-series battery cells	需定制软硬件 Customized hardware and software are required
6	防盗窃模块 Anti-theft module	防盗窃功能，配合云平台实现远程提醒 Anti-theft function, and achieve remote reminder in cooperation with the cloud platform	需定制软硬件 Customized hardware and software are required

附表 1 选配件清单 Appendix 1 List of Optional Accessories

